

## STRADA-T-DN-XP LENSES FOR CREE XP-E LEDs





- Specially designed for Cree XP-E series of LEDs.
- Wide BATWING design with very and uniform light distribution. Planned to be used mixed with Strada-T-DW lenses for optimal streetlight patterns.
- ASYMMETRICAL design with excellent usable efficiency and beam control.
- Efficiently and easily fulfilling different requirements for urban and road lighting when mixed with Strada-T-DW.
- Comes with integrated positioning pins.
- Lens material optical grade PMMA. Allows use of high current and temperature conditions.
- Best available optical efficiency, approximately 92%.
- Fastening to heat sink with or without PU foam adhesive tape of automotive grade, please select which suits the best for your needs.

### LENS TYPES



NAME	ORDERING CODE	FWHM Angle
Strada-T-DN-XP	C11415_Strada-T-DN-XP	approx. $\pm 58^\circ$
Strada-T-DN-XP-TAPE	CA11416_Strada-T-DN-XP-tape	approx. $\pm 58^\circ$


Eulumdat & IES files available by request.


## MEASUREMENT DATA & DRAWING

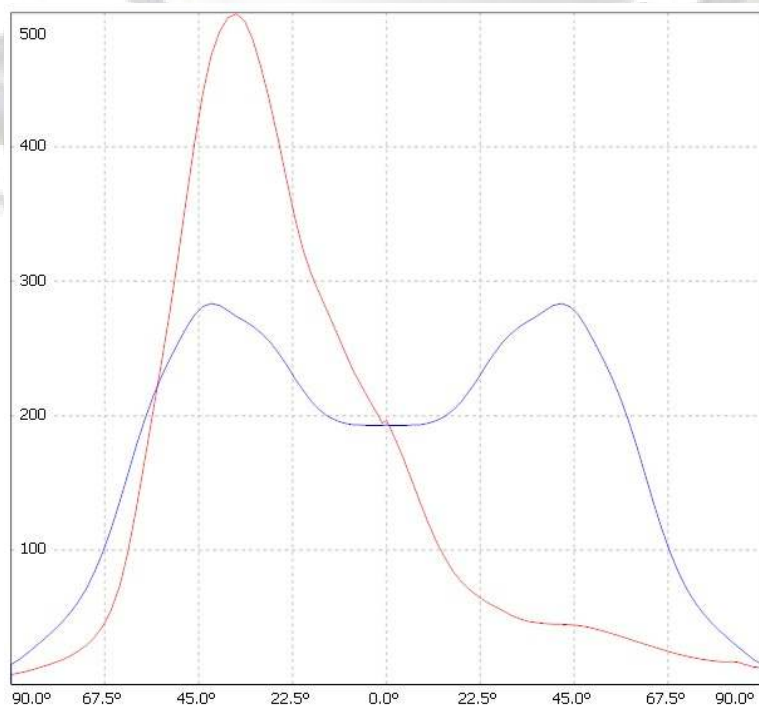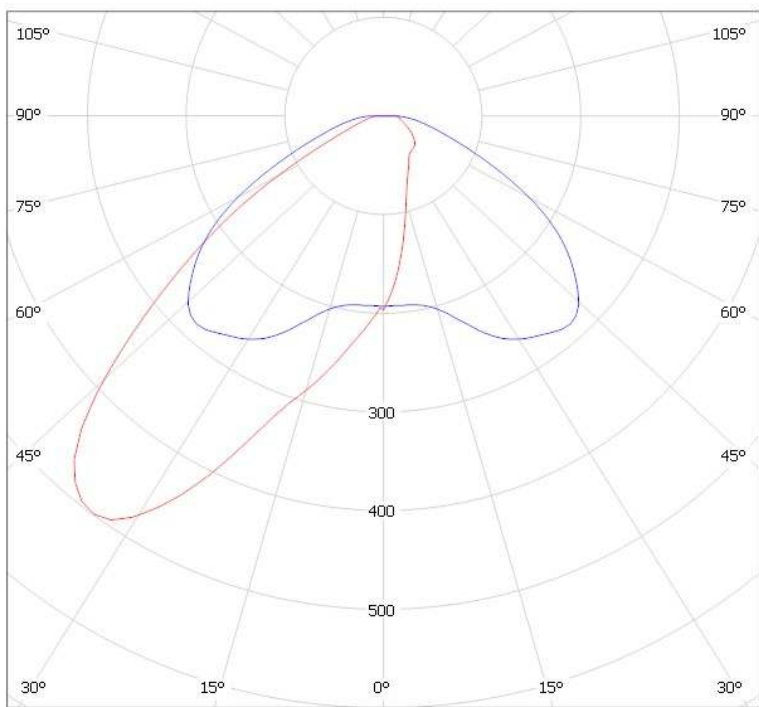

© Ledil Oy – PRELIMINARY - Subject to change without prior notice

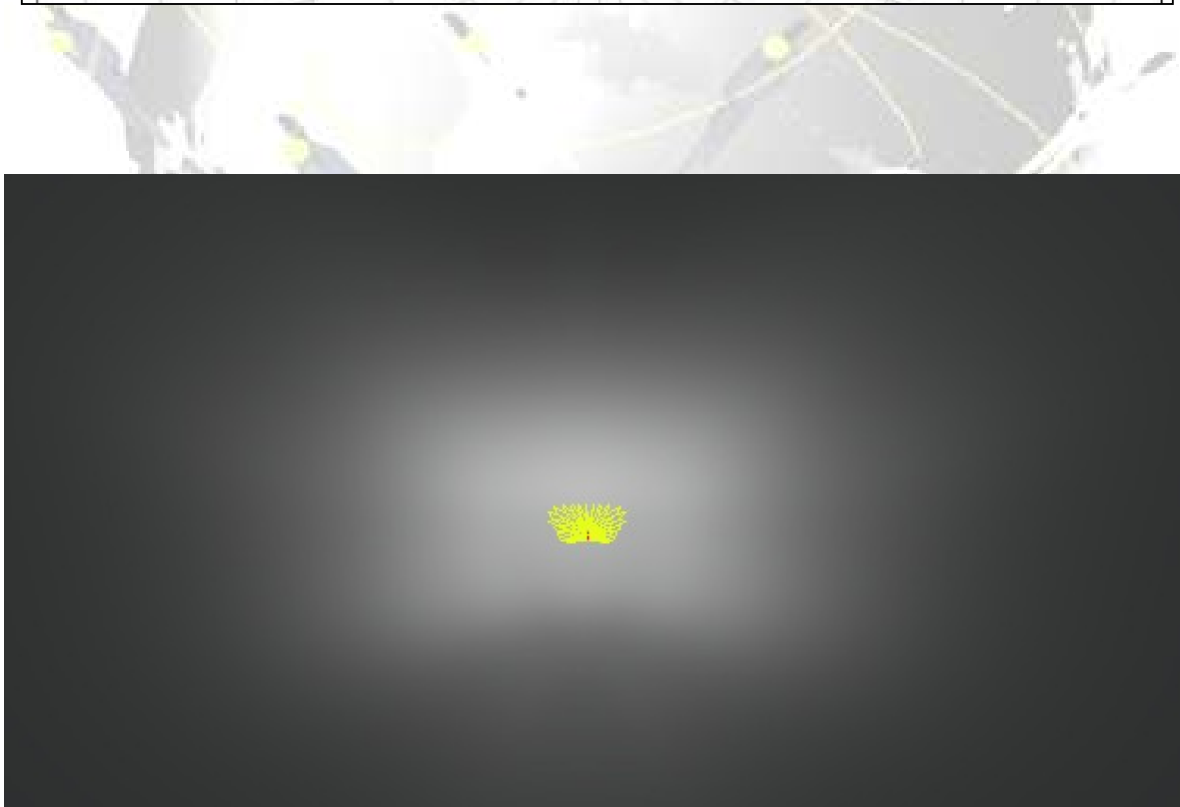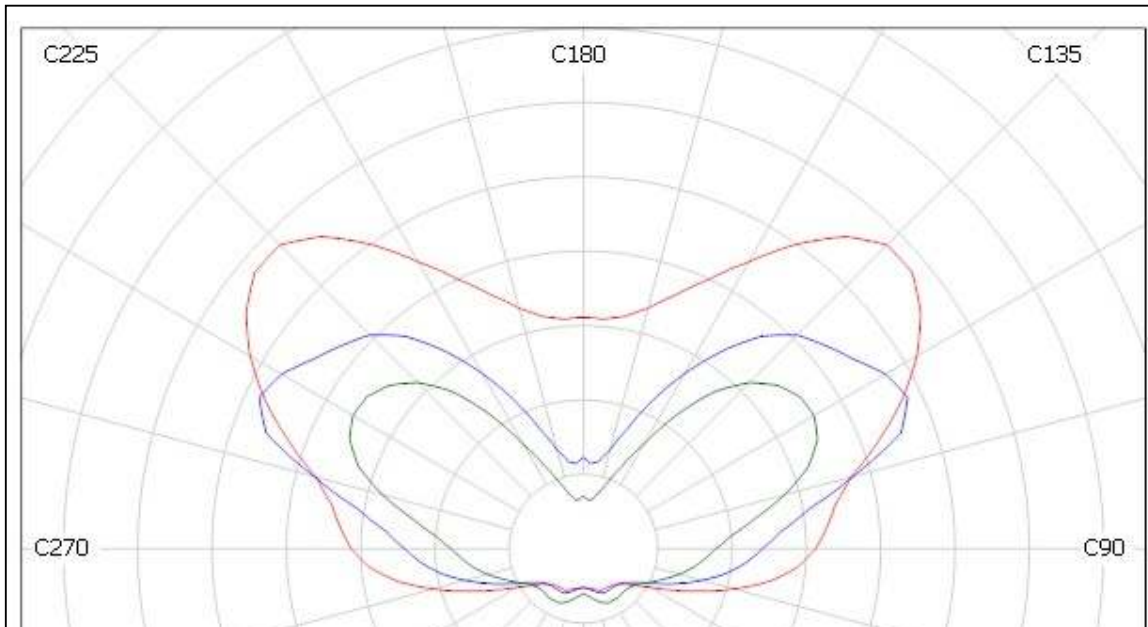

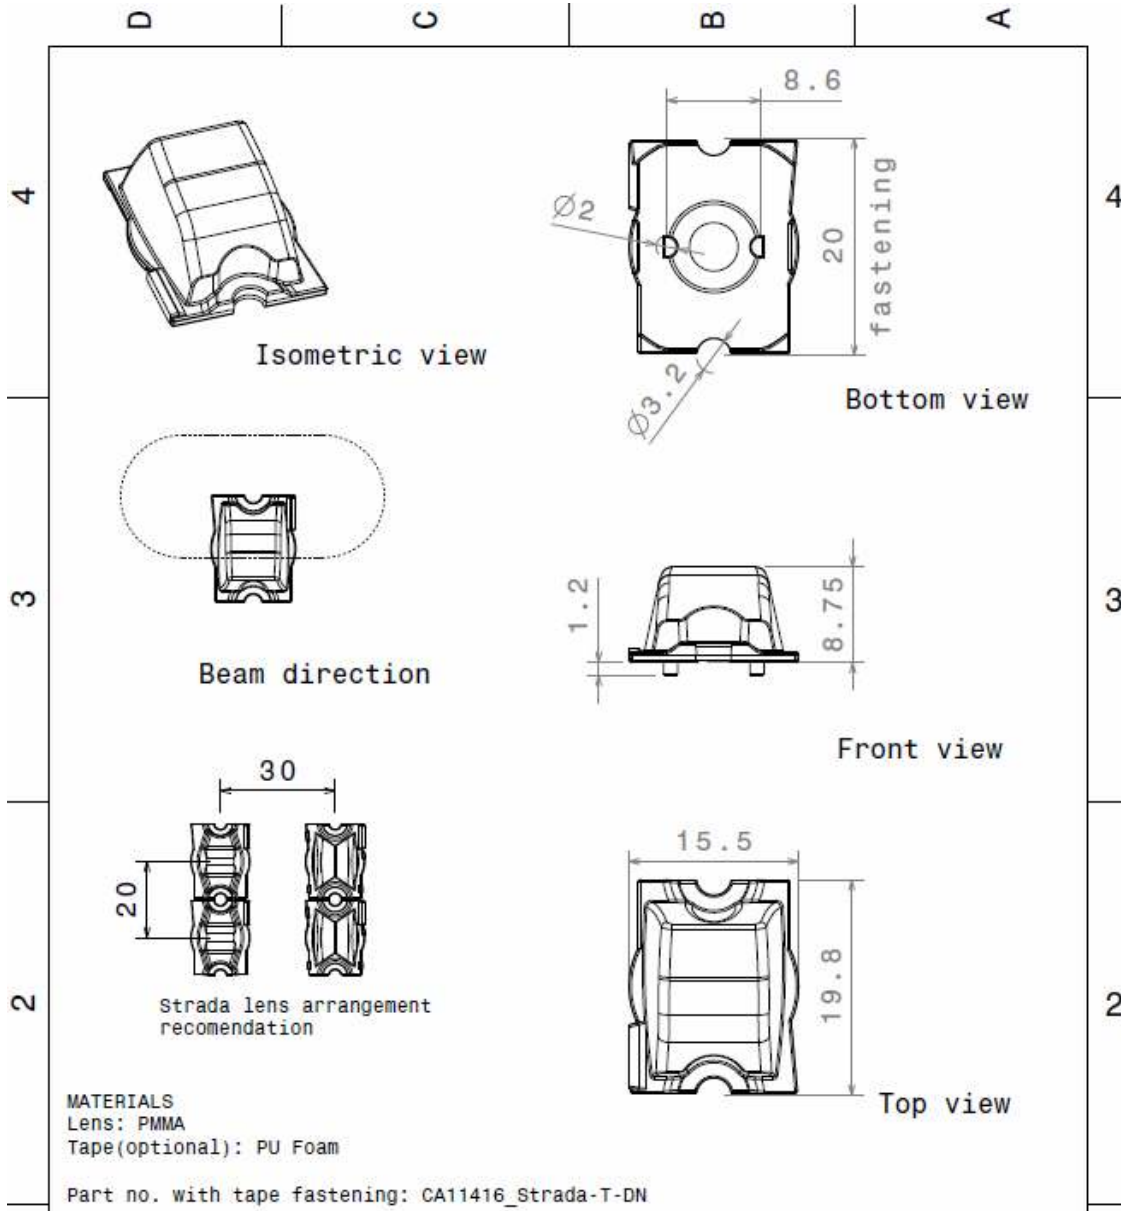

This drawing is our property. It can't be reproduced or communicated without our written agreement.		 Ledil Oy Tehdaskatu 13 FIN-24100 SALO Finland	
DRAWING TITLE		Datashet Strada-T-DN Lens	
DRAWN BY o1	DATE 14.05.2010	SIZE A4	DRAWING NUMBER C11415
CHECKED BY pv	DATE 14.05.2010	SCALE 2:1	REV 1
DESIGNED BY hh	DATE 14.05.2010	WEIGHT(g)	SHEET 1/1