

Regina reflector for Osram Oslon SSL series of LEDs





- Designed & optimized for Osram Oslon SSL series of LEDs
- Reflector material metallized PC. with high UV and temperature resistance (130°C/220°F). Allows use of high current and temperature conditions
- Best available optical efficiency, over 90%
- Small position pins, fastening to heat sink with droplets of glue.
- Compact dimensions 19mm x 15.3 mm (+ position pins 2.5mm)

REFLECTOR TYPES

NAME	ORDERING CODE	FWHM Angle
Regina reflector	C11347_Regina-OSL	±5°


MEASUREMENTS

Relative Intensity of C11347_Regina-OSL

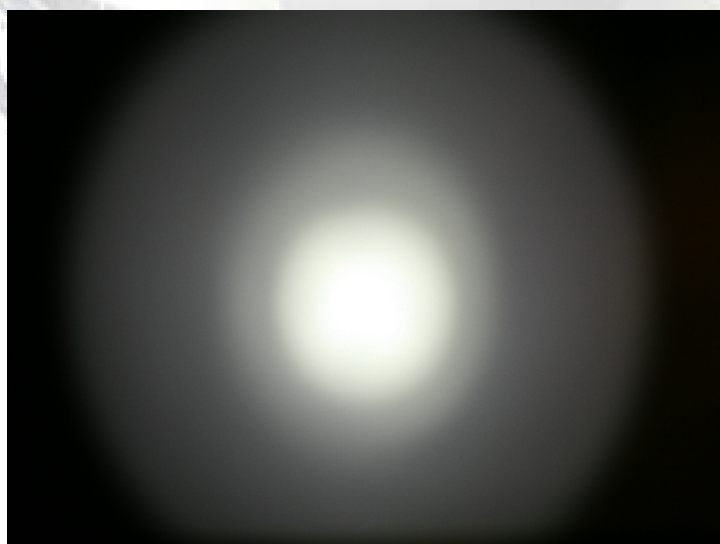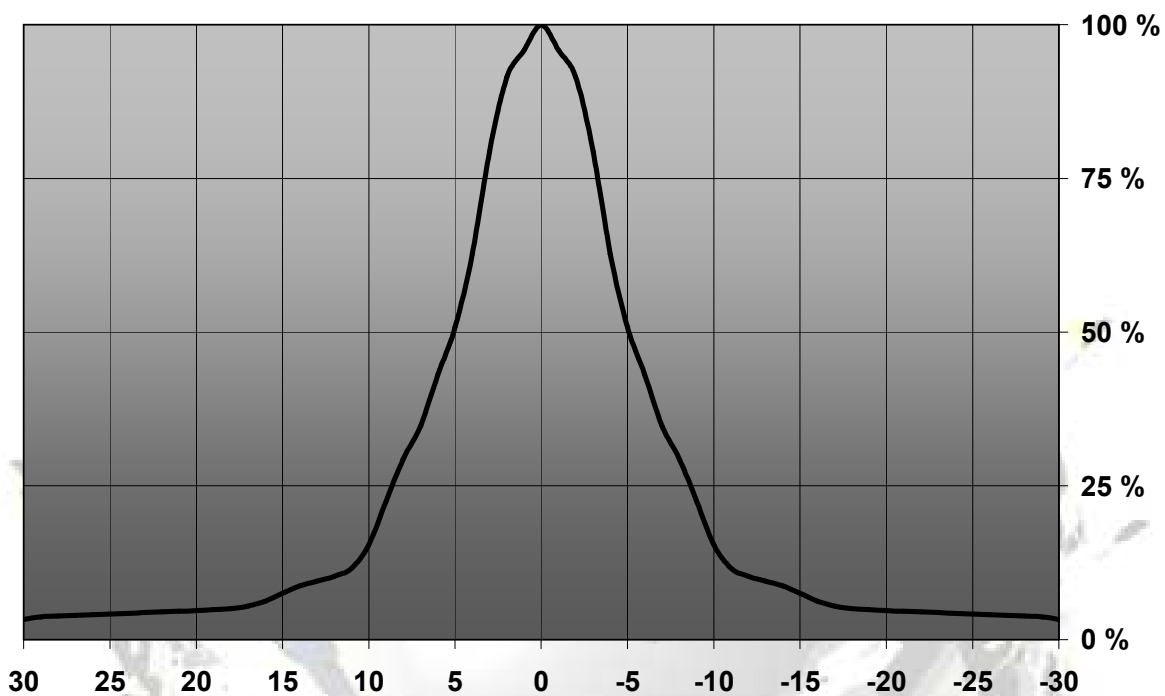

© Ledil Oy – PRELIMINARY - Subject to change without prior notice

DRAWINGS

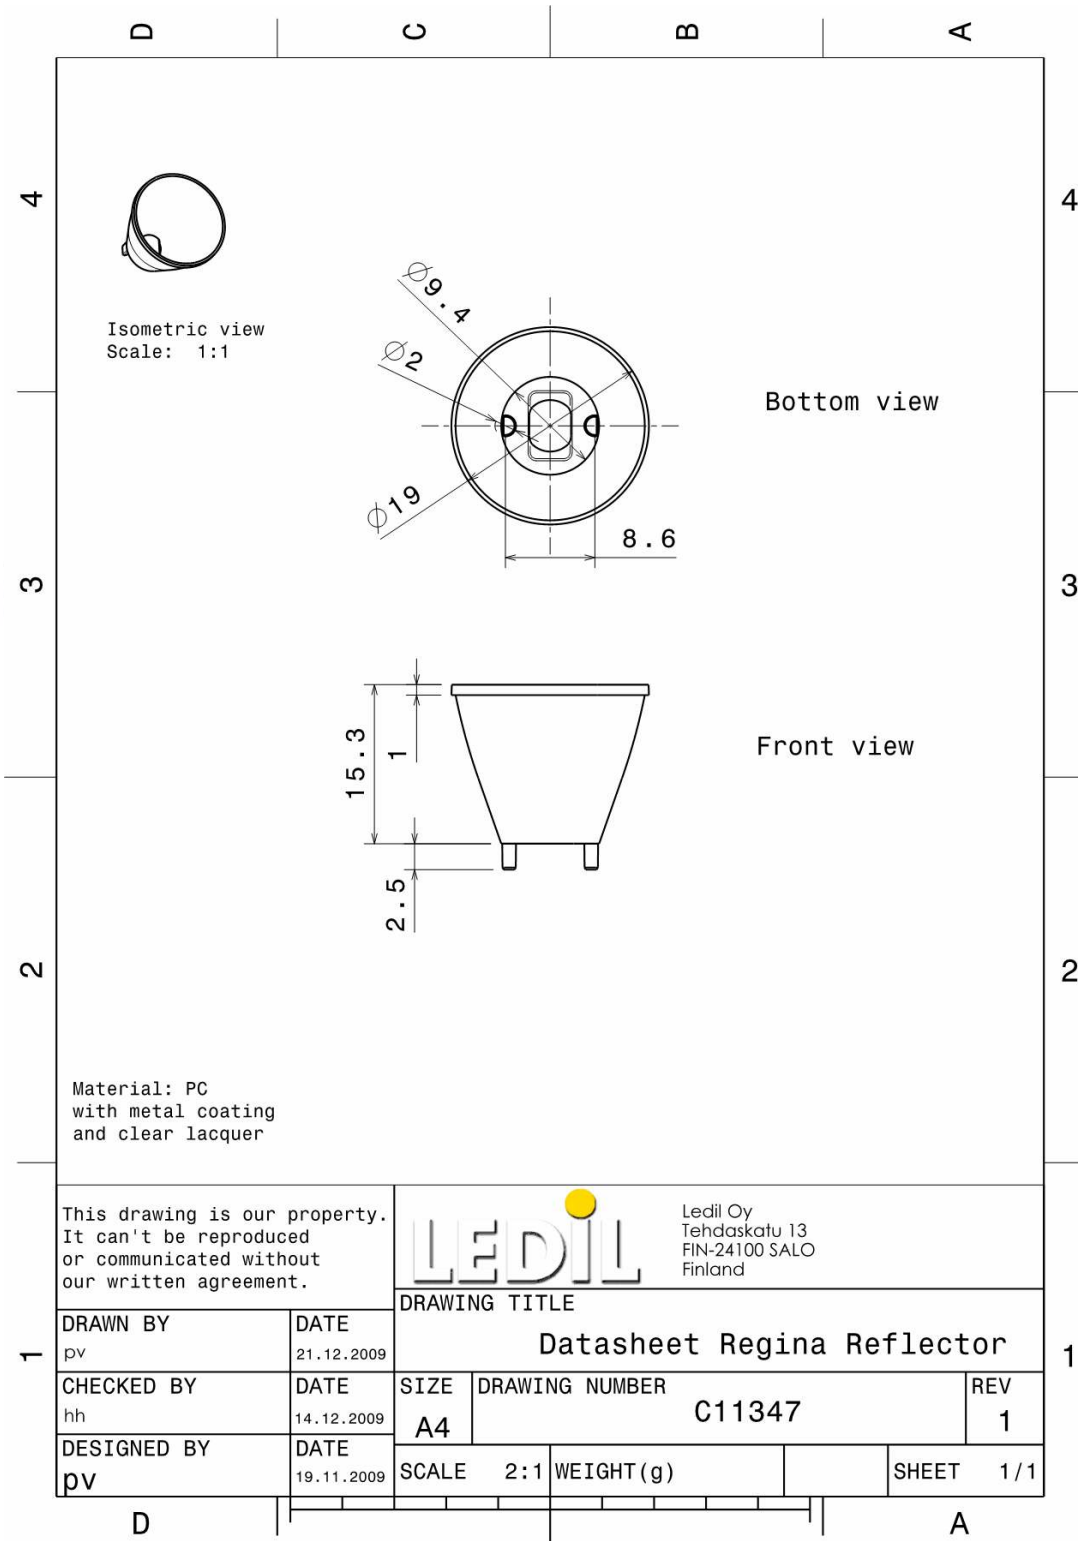

© Ledil Oy - PRELIMINARY - Subject to change without prior notice